

REMACHADORA DE BATERIA





IERO 6.0

Ø4,8mm - Ø6.4mm

Acero/ Aluminio/ A2

Steel/ Aluminium/ Stainless Steel

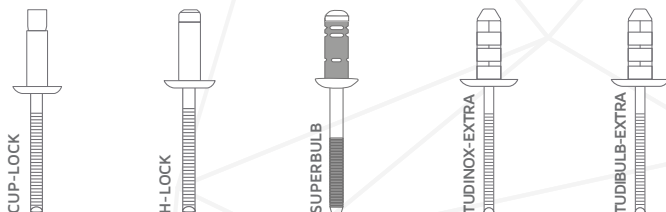

DATOS TÉCNICOS

Remachadora para remaches	Remaches Estandar y Estructurales Ø4.8mm - Ø6.4mm
Carrera	25mm
Fuerza de tracción	20,000N
Cargador	100-240VAC•50-60Hz•18VDC•2,5A max•0,37 kgs
Batería	5 cells • C 2.0 Ah • W 0,36 kg • 18V • Li-ion
Potencia	DC motor 18V
Materiales del remache	Acero • Aluminio • A2
Ideal para	Cup-Lock • H-Lock • Super-Bulb • Tudinox-extra Tudibulb-extra • Cup-bolt
Indicadores led	Indicador de carga Bateria led • 3 leds para la aplicacion
Peso	2,15kgs
Colector de vástagos	Colector de vástagos transparente para control visual

SPECIFICATIONS

Rivet tool for Rivets	Standard and Structural Rivets Ø4.8mm - Ø6.4mm
Stroke	25mm
Traction power	20,000N
Charger	100-240VAC•50-60Hz•18VDC•2,5A max•0,37 kgs
Battery	5 cells • C 2.0 Ah • W 0,36 kg • 18V • Li-ion
Power	DC motor 18V
Material	Steel • Aluminium • Stainless Steel
Suitable for	Cup-Lock • H-Lock • Super-Bulb • Tudinox-extra Tudibulb-extra • Cup-bolt
Light indicators	Battery light indicator • 3 led lights for application
Tool weight	2,15kgs
Nail collector	Transparent colector for visual control